

Запасные части

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mqc@nt-rt.ru || сайт: <https://milliq.nt-rt.ru/>



ZLXM0D070

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 70 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	70 L/hr flow rate
compatibility.....	for use with Elix®

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 70 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D070.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D080

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 80 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	80 L/hr flow rate
compatibility.....	for use with Milli-Q® CLX
.....	for use with Milli-Q® HX

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 80 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D080.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

Milli-Q is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D040

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 40 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	40 L/hr flow rate
compatibility.....	for use with Milli-Q® CLX
.....	for use with Milli-Q® HX

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 40 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D040.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

Milli-Q is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D100

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 100 L/hr

material.....resin (Mixed bed ion-exchange resin)
featureremoves remaining ions by electrodeionization
packagingpkg of 1 unit
manufacturer/tradenameElix®
parameter100 L/hr flow rate
compatibility.....for use with Elix®

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 100 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D100.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D020

Elix® Electrodeionization (EDI) Module

Water purification by electrodeionization (EDI) at 20 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	20 L/hr flow rate
compatibility.....	for use with Elix®

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 20 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D020.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D150

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 150 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	150 L/hr flow rate
compatibility.....	for use with Milli-Q® CLX
.....	for use with Milli-Q® HX

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 150 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D150.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

Milli-Q is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D035

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 35 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	35 L/hr flow rate
compatibility.....	for use with Elix®

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 35 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D035.

Contains mixed bed ion-exchange resin.


Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

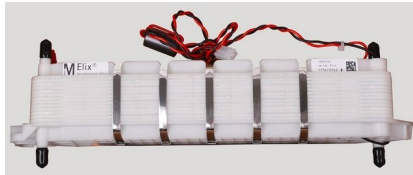

ZTLP0EDI1

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI)

packagingpkg of 1 unit
manufacturer/tradenameElix®
unit H33 cm (13 in.)

Description

General description

The Elix® EDI module is designed to continuously deionize the water, post-reverse osmosis by electrodeionization technique. The Elix® EDI module delivers superior quality pure water consistently and reliably, without any maintenance.

Application


The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications, and for use in clinical analyzers, cell culture incubators and weatherometers.

Features and Benefits

Efficiently removes ions.
High water recovery.
Low maintenance.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

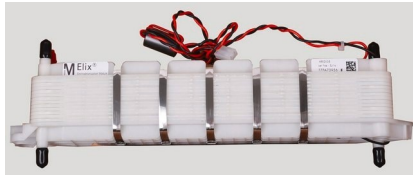

ZLX0EDI03

Elix® Electrodeionization (EDI) Module

Water purification by electrodeionization (EDI) at 3 L/hr

packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	3 L/hr flow rate
unit H	33 cm (13 in.)
compatibility.....	for use with Elix® Essential

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 3 L/hr.

Application


The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

- Genuine replacement part for the Elix® EDI Module - ZLX0EDI03
- Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO2 levels) or RO cartridge performance.
- Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.
- Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

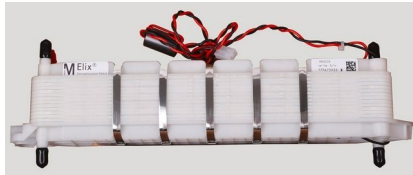

ZLX0EDI05
Elix® Electrodeionization (EDI) Module

Water purification by electrodeionization (EDI) at 5 L/hr

packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	5 L/hr flow rate
unit H	33 cm (13 in.)
compatibility.....	for use with Elix® Essential

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 5 L/hr.

Application


The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

- Genuine replacement part for the Elix® EDI Module - ZLX0EDI05
- Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO2 levels) or RO cartridge performance.
- Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.
- Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

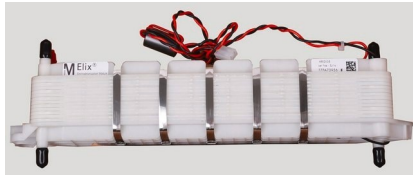

ZLX0EDI15

Elix® Electrodeionization (EDI) Module

Water purification by electrodeionization (EDI) at 15 L/hr

packagingpkg of 1 unit
manufacturer/tradenameElix®
parameter15 L/hr flow rate
unit H33 cm (13 in.)
compatibility.....for use with Elix® Essential

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 15 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement for part the Elix® EDI Module - ZLX0EDI15


Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

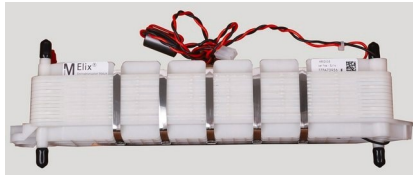

ZLX0EDI10

Elix® Electrodeionization (EDI) Module

Water purification by electrodeionization (EDI) at 10 L/hr

packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	10 L/hr flow rate
unit H	33 cm (13 in.)
compatibility.....	for use with Elix® Essential

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 10 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

- Genuine replacement part for the Elix® EDI Module - ZLX0EDI10
- Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO2 levels) or RO cartridge performance.
- Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.
- Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXM0D120

Elix® Electrodeionization (EDI) Module

Water Purification by Electrodeionization (EDI) at 120 L/hr

material.....	resin (Mixed bed ion-exchange resin)
feature	removes remaining ions by electrodeionization
packaging	pkg of 1 unit
manufacturer/tradename	Elix®
parameter	120 L/hr flow rate
compatibility.....	for use with Milli-Q® CLX
.....	for use with Milli-Q® HX

Description

General description

The Elix® electrodeionization (EDI) module is designed to continuously deionize water following reverse osmosis (RO). The Elix® module aids in delivering superior quality pure water consistently and reliably, without any maintenance at a flow rate of 120 L/hr.

Application

The Type 2 water produced post RO-EDI treatment meets the needs of many general laboratory applications (e.g. sample preparation, buffer and reagent preparation, glassware rinsing), and as feed for equipment and instruments (e.g. autoclaves, dishwashers, weathering and stability test chambers, clinical analyzers and slide stainers, hydrogen generators and ultrapure water systems).

Features and Benefits

Genuine replacement part for the Elix® EDI Module - ZLXM0D120.

Contains mixed bed ion-exchange resin.

Efficiently removes remaining ions from RO-purified water to produce constant-quality pure water, regardless of feed water quality (conductivity, CO₂ levels) or RO cartridge performance.

Eliminates the need for hazardous chemical regeneration procedures, replacement of costly resins, changing DI cartridges, or adding softeners.

Reduces maintenance time, ensuring low and predictable running costs.

Legal Information

ELIX is a registered trademark of Merck KGaA, Darmstadt, Germany

Milli-Q is a registered trademark of Merck KGaA, Darmstadt, Germany



ZLXLP0D01

Loop-Point of Delivery-Inters-T-valve

Additional loop point to make a second Point of Delivery on the water distribution loop

packagingpkg of 1 unit
compatibility.....for use with Milli-Q® CLX
.....for use with Milli-Q® HR
.....for use with Milli-Q® HX

Description

General description

This accessory kit contains parts to make a second point of delivery on the water distribution loop. Normally, the distribution loop has at least one point of use. This accessory is required when creating additional points of delivery. The kit contains an interconnector "I" Hose barb 3/8" (to fit 10x16 tubings), interconnector "T" 3/8", Oeticker rings, interconnector wall mounting bracket (to wall mount the "T" interconnector), a Clamp for interconnector and a Ball valve.

Application

To add second Point of Delivery to a distribution loop.

Features and Benefits

Genuine accessory for Loop-Point of delivery - Inters-T-valve - ZLXLP0D01

Legal Information

Milli-Q is a registered trademark of Merck KGaA, Darmstadt, Germany

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: mqc@nt-rt.ru || сайт: <https://milliq.nt-rt.ru/>